

NEW Diesel Generator Katolight - MTU 40 KW

\$ Call for Pricing

Engine Model: **John Deere 4024HF285**,
Voltage: **240 Volt 1 Phase 12w 60Hz**

RATINGS -

Single Phase (Can be converted to 3 Phase)

KW: 40,

KVA: 40,

P.F.: 1,

Temperature Rise: 130 Deg,

COOLING SYSTEM

50 Deg C Cooling System,

CONTROL PANEL

45K Control Panel,

Standard Panel

Emergency Stop Button,

CIRCUIT BREAKER

Circuit Breaker Rating - CB 80% Rated

200 Amp J Frame 2 Pole 80% Standard CB,

OTHER COMPONENTS

Jacket Water Heater:

-20 Deg F Block Heater 120V 1PH - 1500W,

Air Filter: Standard Duty,

Crankcase Vent System: No Crankcase

Ventilation Filter (Standard),

Battery Configuration: Battery; Rack & Acid,

Battery Charger: Mounted and Wired.

PAINT: Tan

HOUSING

Housing Option: Level 1 Enclosure - Standard,

- Wind Rating 150 MPH Standard

Exhaust Grade: Hospital Grade Silencer

(Standard),

FUEL TANK

No Fuel Tank

WARRANTY

Warranty 2 Yr/3000 Hr Basic Stdbly Limited

Warranty (Std),

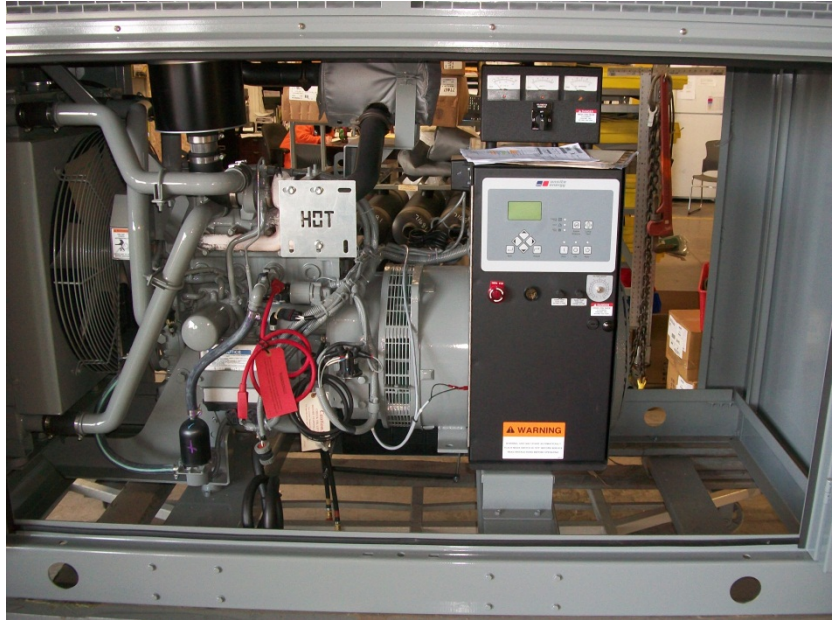


Photo may not be actual unit listed.



Photo may not be actual unit listed.